



# ANAX™ 5.5 Spinal System

The ANAX™ 5.5 Spinal System is a top-loading multiple component, posterior spinal fixation system

Self tapping pedicle screw design—protection of screw pullout and easy insertion

No cross-threading and head splay

Low-profile screw—minimizing the risk of facet impingement and soft tissue irritation

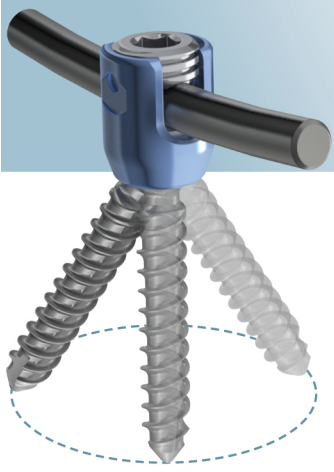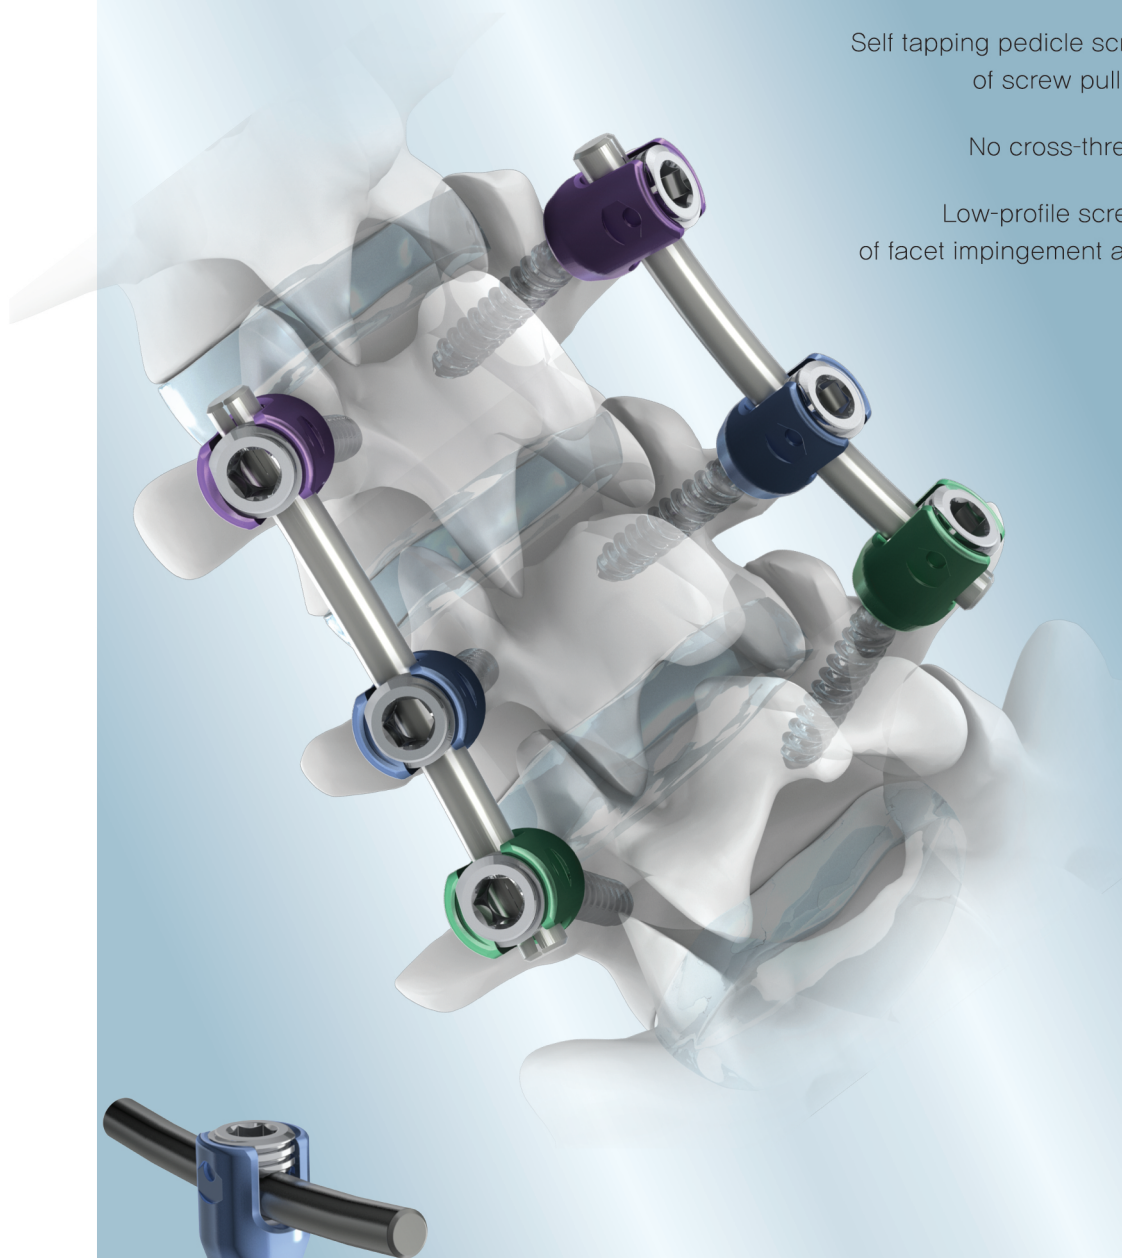

Allowable angulation of screw  
**up to 65°** in all directions


## Straight and pre-contoured 5.5mm Titanium and Cobalt Chromium (CoCr) rods

– reducing implantation steps and assuring strength and biocompatibility

### Top-loading type of cross link


– minimizes dura impingement

- 33~40 mm
- 40~50 mm
- 50~60 mm
- 60~70 mm
- 70~80 mm
- 80~90 mm

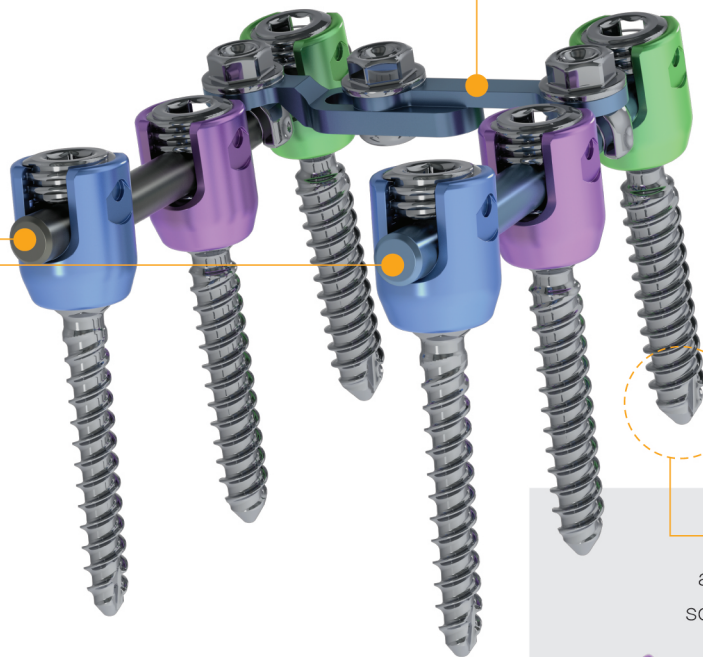

### Double helical screw thread

accelerates insertion without compromising screw purchase and reduce surgeon fatigue

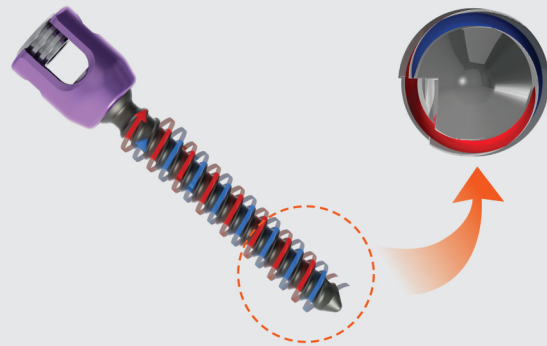

### Screw size

Screw Diameter (mm)	Screw Length (mm)													
	30	35	40	45	50	55	60	65	70	75	80	85	90	95
4.0	✓	✓	✓	✓	✓	✓	✓							
5.0	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
6.0	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
7.0	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
8.0	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

### Rod size

Rod Type	Rod Length (mm)																			
	35	40	45	50	60	70	80	90	100	110	120	130	140	150	200	300	400	480	600	
Curved	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓								
Straight	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓